



CONCELED DOORS SD LIGHT FOR PAITING

NEW SD LIGHT LINE - IS THE ALUMINIUM DOOR LEAF FRAME WITH THE RELIABLE WELDED JOINTS.

WATERPROOF MDF 6mm

THE DOOR LEAF IS FINISHED WITH THE POLYURETHANE PRIMER AND DOES NOT REQUIRE ADDITIONAL PROCESSING

RELIABLE HIGH-QUALITY ITALIAN ACCESSORIES

THE DOOR UNITS ARE SUPPLIED PRE-ASSEMBLED AND FULLY READY FOR INSTALLATION

2 YEARS WARRANTY



concealed doors

* SD LIGHT DOOR JAMB "STANDARD" 40MM

aluminium door leaf frame with the outside opening




DIMENSIONS	HEIGHT mm	WIDTH mm		
OPENING	2053	686	786	886
DOOR UNIT	2043	666	766	866
DOOR LEAF	2000	600	700	800


Outside opening only S2 Left S1 Right

concealed doors

◆ **SD LIGHT** DOOR JAMB «UNIVERSAL» 45MM aluminium door leaf frame with the inside opening

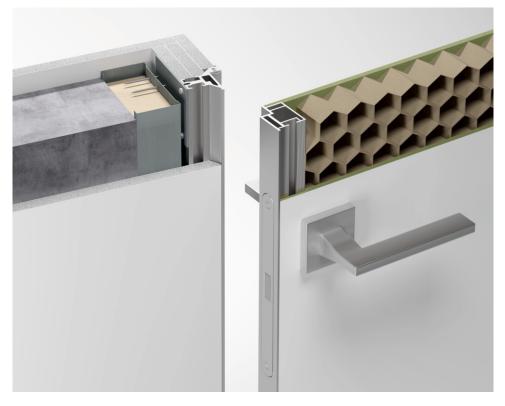


DIMENSIONS	HEIGHT mm	WIDTH mm			
OPENING	2065	686	786	886	
DOOR UNIT	2055	666	766	866	
DOOR LEAF	2000 2012	600	700	800	





Adjacent doors with the different opening types

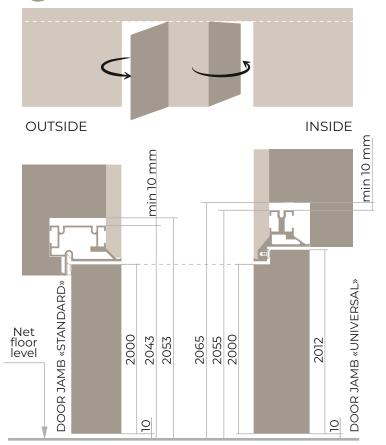

To place adjacent doors with the different opening types ("pull" and "push") on the same level it is important to take into account the difference of the door frame height of 12 mm.

Consider that for such a set the combination of the doors SD Light with the "Standard" frame for the outside opening and the doors with the "Universal" frame for the inside opening is used.

PAINTING OPTION

The possible painting of the door leaf on the **RAL, NCS palettes:**

+140€ to the door unit value; delivery terms are increased till 45 days;



Door unit set



advantages of SD Light



Fully assambled door unit



Ouality certificate



Polyurethane primer



Welded door unit structure



Italian accessories



Made in Ukraine




warrantv

Customer information


- · SD Light doors have a new optimized door leaf structure and aluminium door leaf frame with the welded connection due to which the highest level of reliability is reached
- ·SD Light door units are equiped with the high-qulity Italian accessories with the resources of 500.000 close/open cycles (up to 30 years of intensive usage)
- *A producer retains the right to make the changes in the construction and assembly for the sake of the product improvement without a preliminary agreement with the client.



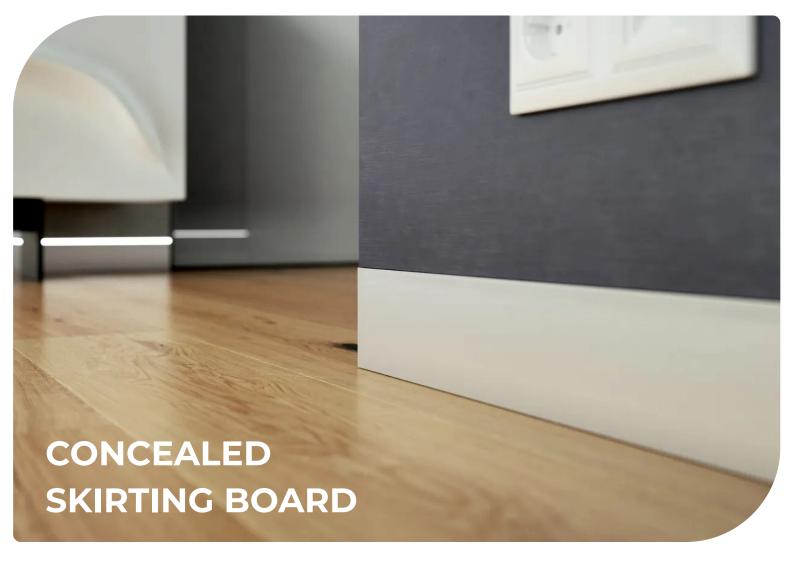

CONCEALED SKIRTING BOARD SET

♦ ALUMINIUM BASE Bar lenght 2 metres



CONCEALED SKIRTING BOARD INSERT Bar lenght 2 metres

